

# SR61XR

Near/Far Range 2D Industrial  
Handheld Scanner Family  
*Enhanced with Vesta Decoding*



**With the flagship Intermec SR61XR rugged handheld bar code scanner, you can eliminate the need for multiple scanning devices and benefit from a substantially reduced total cost of ownership. The SR61XR scanners are:**

- **Incomparable** – breakthrough near-to-far area imaging technology enables hassle-free 1D and 2D scanning from near contact to over 50 feet away
- **Easy to use** – laser spot aimer and omni-directional scanning make targeting simple
- **Future proofed** – ready for the increasing use of 2D and stacked bar code symbologies
- **Rugged** – designed to withstand drops to concrete or steel from 6.5 feet, hot and cold temperature extremes, constant forklift vibration and windblown dust and rain
- **Fast** – full speed USB 2.0 wired or Bluetooth® wireless interface to quickly transfer bar code data or images to host system

The Intermec SR61XR is the first handheld scanner on the market with integrated near/far area imaging technology, offering the unparalleled flexibility to read multiple symbologies, omni-directionally, at distances from six inches to over 50 feet. Like the rest of the venerable SR61 scanner family, these models incorporate a rugged design and optional Bluetooth® wireless communication.

The SR61XR can eliminate the need for multiple scanners, substantially reducing total cost of ownership. Scan 1D, 2D, composite and postal codes; capture images, signatures and documents; read at near and far distances; and successfully cope with damaged, poorly printed and partially obscured codes in varied lighting conditions. The addition of VESTA, Intermec's patented scanning algorithm, increases scan range by an average of 60 percent when scanning EAN/UPC and Code 39 symbologies (compared to previous generation SR61 scanners). Along with advanced features, the SR61XR delivers incredible responsiveness and advanced imaging capabilities like data parsing, multi-code reading, and image/video capture are standard.

With omni-directional scanning, laser pointer, auto-illumination and center decoding, the SR61XR makes it easy to scan at variable distances, lighting conditions and angles—improving worker productivity and virtually eliminating the “trial and error” of scanning. Operators of

fork trucks equipped with vehicle-mounted mobile computers, such as the Intermec CV series, will appreciate how the near/far scanning capability of the SR61XR allows them to remain seated while scanning stacked pallets at extended ranges.

Variable distance scanning technology means multiple purpose-built scanning devices can be consolidated into a single solution. This incredible versatility makes the SR61XR suited to inventory management, picking, shipping and receiving, cross docking, pallet tracking, and virtually all other common scanning routines in the distribution center.

For those requiring an industrial bar code scanner for hazardous environments, the SR61 is now available in a non-incendive configuration ideal for tracking barrels, drums and other combustible materials. This represents a robust solution for wedge-based scanning in hazardous or explosive environments rated Class 1; Division 2; Groups A, B, C, and D.

The SR61XR includes Intermec's EasySet™ software setup tool for easy scanner configuration and personalization, whether that involves specific bar code symbologies, decoding poor quality or damaged codes, or utilizing image capture for proof of delivery and point of service applications. You can also quickly set security options, select beeper tones and volume, specify good read and error read responses, and make many other customizations.

## Comprehensive Support Services Available

Intermec bar code scanners operate in dynamic business environments, and a support plan can protect you from unforeseen contingencies. *Intermec Medallion® Service* programs deliver the highest levels of productivity, device reliability, and uptime. The *Medallion® Complete* support package covers hardware failure, general wear and tear and accidental damage. For more information, visit [www.intermec.com/services](http://www.intermec.com/services).

### Physical Characteristics – Tethered Models

#### Dimensions (LxWxH):

19.4 cm (7.6 in) x 7.2 cm (2.8 in) x 13.1 cm (5.2 in)

Weight: 320 gm (11.2 oz)

### Physical Characteristics – Wireless Models

#### Dimensions (LxWxH):

17.8 cm (7 in) x 7 cm (2.75 in) x 11.4 cm (4.5 in)

Weight (without battery): 425 gm (15 oz)

### Power – Tethered Models

Power Requirements: 5V DC, 1.7A

### Power – Wireless Models

Battery Type: Lithium-ion

Battery Life: 10+ hours per full charge

Recharge Time: 2.5 hours for 90% charge

### Connectivity

Connects to Intermec computers and printers, as well as standard PCs.

### Interfaces – Tethered Models

RS232, USB 2.0 (HID Keyboard, Virtual Com Port, Video Class), Keyboard Wedge, Wand Emulation

### Interfaces – Wireless Models

SPP, HID Keyboard

### Radio – Wireless Models

Frequency Band: 2.4 GHz

Type: Bluetooth class 1 version 2.1 + EDR

Range (Class 1): 100 m (325 ft) in open space,

30 m (100 ft) in typical work environment


Features: Adaptive frequency hopping

### Scan Engine

SR61TXR & SR61BXR - Near/Far Area Imager (EX25)

### Scan Range – Typical reading distances at 200 lux

#### SR61xXR (EX25) with VESTA\*

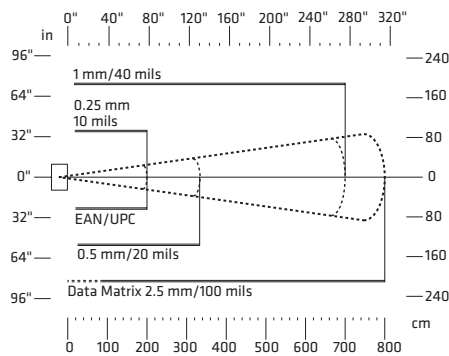

Symbology	Density	Minimum Distance	Maximum Distance
Code 39	0.25 mm (10 mils)	11 cm (4.3 in)	200 cm (6.6 ft)
	0.5 mm (20 mils)	16 cm (6.3 in)	330 cm (10.9 ft)
	1 mm (40 mils)	38 cm (14.9 in)	700 cm (23 ft)
EAN 100%	0.33 mm	20 cm (7.87 in)	200 cm (6.6 ft)
DataMatrix	0.25 mm (10 mils)	16 cm (6.3 in)	80 cm (2.6 ft)
	1.4 mm (55 mils)	depends on bar code length	400 cm (13.1 ft)
	2.5 mm (100 mils)	depends on bar code length	800 cm (26.2 ft)

\* VESTA is an Intermec-patented algorithm that increases read range of Code 39 and EAN/UPC marks by an average of 60 percent (compared to previous-generation SR61 scanners).

### Supported Bar Code Symbolologies

**1D & Stacked:** Codabar; Codablock A; Code 11; Code 128 (GS1-128); Code 39; Code 93/93i; EAN/UPC; GS1 DataBar Expanded; GS1 DataBar Limited; GS1 DataBar Omni-Directional; GS1 DataBar Stacked; Interleaved 2 of 5; Macro PDF; Micro PDF; Matrix 2 of 5; MSI; PDF417; Plessey; Standard 2 of 5; Telepen; TLC39

**2D:** Aztec; DataMatrix; GS1 Composite; Maxicode; QR Code

**Postal:** Australian Post; BPO; Canada Post; Dutch Post; Infomail; Intelligent Mail; Japan Post; Planet; Postnet; Sweden Post

### Environment

**Operating Temperature:** -20°C to +50°C (-4°F to +122°F)

**Storage Temperature:** -20°C to +60°C (-4°F to +140°F)

**Recharging Temperature:** 0°C to +35°C (32°F to +95°F)

**Humidity:** 0 to 95% RH, Non-condensing

**Shock and Vibration Protection:** SAE Specification J1399 Class 3 (off road vehicle)

**Rain and Dust Resistance:** IP54

**Drop Survival:** 26 drops onto concrete or steel surface from a height of 1.98 meters (6.5 feet)

**Ambient light:** Works in any lighting conditions from 0 to 100,000 lux

### Standard Warranty

**Tethered Models (SR61T):** 3 years

**Bluetooth Models (SR61B):** 3 years (90 days on battery)  
Extended protection available with Medallion support

### Accessories

For a full listing of compatible accessories, visit [www.intermec.com/sr61](http://www.intermec.com/sr61).

### Regulatory Approvals (SR61T)

Laser Class 2; CE Mark (EU) (EN 55024, EN 55022 Class B, IEC 60950-1, IEC 60825-1); CISPR 22 Class B; CQC (CH); cULus (CA/USA) (UL 60950-1); C-TICK (AU/NZ); GS Mark (DE) (EN 60950-1, EN 60825-1); KCC (KR); NOM (MX); Part 15 of FCC Rules, Class B

### Regulatory Approvals (SR61B)

Laser Class 2; ANATEL (BR); CE Mark (EU) (EN301 489-17 V2.1.1, EN 300 328 V1.7.1, IEC60950-1, IEC60825-1); COFETEL (MX); cULus (CA/USA) (UL 60950-1); C-TICK (AU/NZ); KCC (KR); SRRS (CH); Part 15 of FCC Rules, Class B

### Regulatory Approvals for Hazardous Environments (SR61BXR-900)

Non-Incendive (Class 1; Division 2; Groups A, B, C, D; T6)

### North America

#### Corporate Headquarters

6001 36th Avenue West  
Everett, Washington 98203  
Phone: (425) 348-2600  
Fax: (425) 355-9551

### North Latin America

#### Headquarters Office

Mexico  
Phone: +52 55 52-41-48-00  
Fax: +52 55 52-11-81-21

### South Latin America

#### Headquarters Office

Brazil  
Phone: +55 11 3711-6776  
Fax: +55 11 5502-6780

### Europe/Middle East & Africa

#### Headquarters Office

Reading, United Kingdom  
Phone: +44 118 923 0800  
Fax: +44 118 923 0801

### Asia Pacific

#### Headquarters Office

Singapore  
Phone: +65 6303 2100  
Fax: +65 6303 2199

### Internet

[www.intermec.com](http://www.intermec.com)  
Worldwide Locations:  
[www.intermec.com/locations](http://www.intermec.com/locations)

### Sales

Toll Free NA: (800) 934-3163  
Toll in NA: (425) 348-2726  
Freephone ROW:  
00 800 4488 8844  
Toll ROW: +44 134 435 0296

### OEM Sales


Phone: (425) 348-2762

### Media Sales

Phone: (513) 874-5882

### Customer Service and Support

Toll Free NA: (800) 755-5505  
Toll in NA: (425) 356-1799

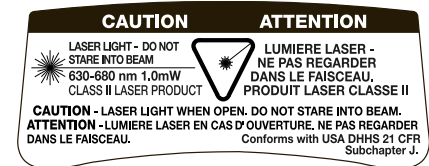

Copyright © 2013 Intermec Technologies Corporation. All rights reserved. Intermec is a registered trademark of Intermec Technologies Corporation. All other trademarks are the property of their respective owners. 612199-B 02/13

In a continuing effort to improve our products, Intermec Technologies Corporation reserves the right to change specifications and features without prior notice.

