

NETMark IQ Near-Edge Wax/Resin

Wide Ranging Print Performance



Food/Beverage



Health/Beauty



Industrial



Logistics



Medical



Retail



The printhead cleaner built in your ribbon.

Benefits

- Compatible with Toshiba TEC, Novexx and other near-edge printers
- Dark black barcodes and images with solid fill and no show-through
- Broad stock latitude from rough vellum to smooth synthetics
- Fast print speeds
- Low to mid energy range prolongs printhead life
- Wax/Resin formula provides good resistance to abrasion
- Clean Start® built-in printhead cleaner maintains print quality
- Can be used in flexible packaging coders (See NETFlex+)

Recommended Stocks

Paper

- Vellum
- Matte Coated
- Semi-Gloss
- Gloss

Synthetics

- PP / Polypropylene
- PE / Polyethylene
- Polyolefin (e.g. Tyvek)

Applications

- Compliance labeling
- Component identification
- Flexible packaging
- Hang tags
- Ingredient lists
- Medical devices
- Pallet labeling
- Product identification
- Shelf marking
- Shipping
- Warehousing
- Work in process (WIP)

Key Product Range

STANDARD WAX	ENHANCED WAX	WAX RESIN	RESIN	NEAR EDGE
SW200	GP725 High Mark DC100	PM308 Prime Mark DC200	SP330 SP575 DC400	NETMark IQ NETFlex+ NET330

Technical Specifications

Color Code Tab Copper
 Film Thickness 4.5 Microns
 Total Ribbon Thickness 8.0 Microns
 Transmission Density 1.1 MacBeth Scale
 Ink Melting Point 70°C / 158°F

Imaging Characteristics

Printhead Near Edge
 Max Print Speed 24 IPS (610 mm/s)
 Image Darkness 1.7 RD (densitometer)
 Heat Resistance Moderate


Compliance

- REACH – SVHC Free
- RoHS/WEEE
- California Proposition 65
- FDA 21CFR175
- ISEGA Approved
- Additional Regulatory Requirements Upon Request

Storage Conditions

12 months recommended
 20-85% Relative Humidity Rate, 23-104°F (-5-40°C)

Performance Ratings

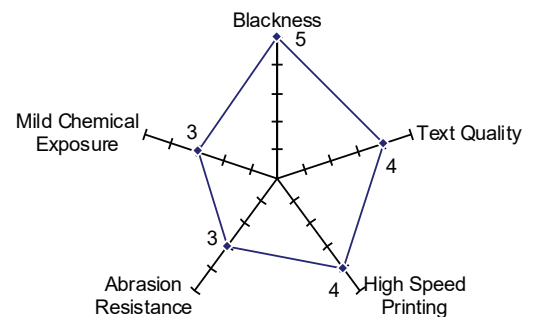

310 Commerce Drive • Amherst, NY 14228
 Toll-Free: 888.464.4625 • Phone: 716.691.6333
salesinfo@iimak.com • www.iimak.com